


## S6EXK0015/328

### Beamexpander

- magnification 1.5x
- for 1030 nm - 1090 nm
- fused silica
- low absorption coating

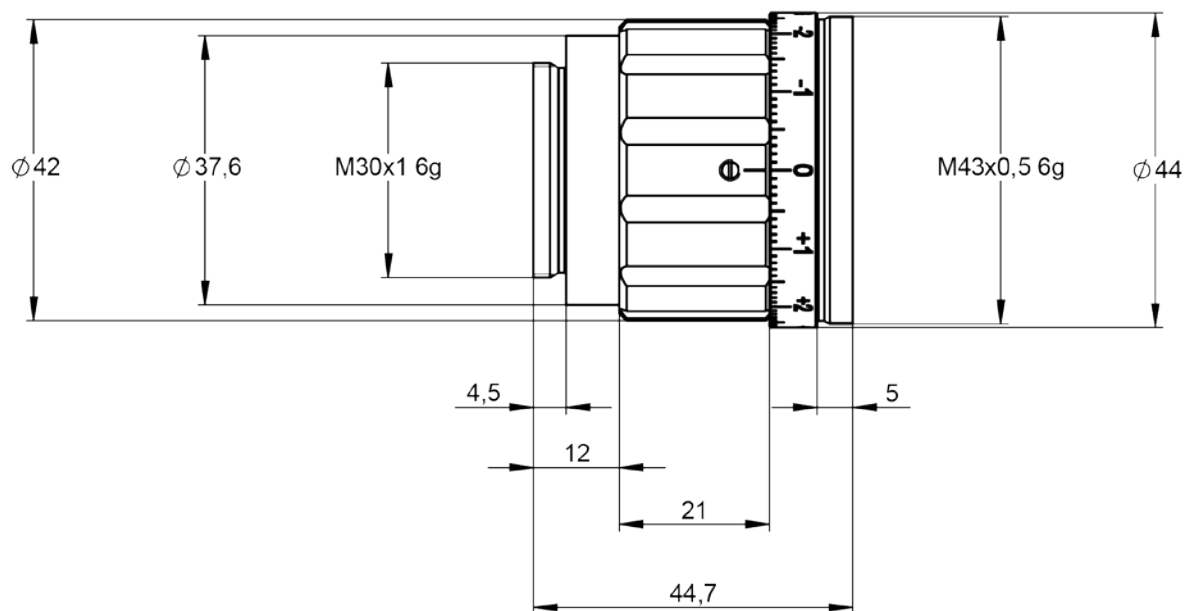

# DATA SHEET



## specifications

article number	S6EXK0015/328
design wavelength [nm]	1064
magnification factor	1.5x
divergence adjustable	✓
optical principle	Galilei (no internal focus)
mounting thread	M30x1
pointing stability [mrad]	< 1
clear input aperture [mm]	12.0
clear output aperture [mm]	26.0
max. input beam diameter [mm]	10.0
wavefront error <sup>1)</sup>	< $\lambda/10$ for $1/e^2$ diameter <sup>2)</sup> of 10.0
total number of lenses	2
total transmission [%]	99
lens material	fused silica
LIDT (coating) [J/cm <sup>2</sup> ]	5.0 (1ns pulse at 50Hz)
no internal ghosts	✓
no internal ghosts, reversed usage	✗
weight [kg]	0.2
accessory	S6MEC0127 - adapter M30x1 to C-mount

## notes

- 1) Wavefront error peak to valley on axis proved by design  
2) beam diameter vignetted at  $1/e^2$

Data given by design

LIDT = Laser Induced Damage Threshold, valid for the coating at design wavelength and gaussian intensity profil

length at divergence setting „0“. Max. lengthening of 3 mm is possible