

DSS 1064-Q

Diode Pumped Passively Q-Switched Solid State Laser

- 1064 nm
- Pulsed (≤ 1.5 ns)
- $> 90 \mu\text{J}$
- Up to 20 kHz
- External and Internal Trigger
- Free Beam or Fiber Coupling
- Single Pulse Operation



biology · biomedicine · chemistry · analytics


Optical Data		DSS1064-Q1	DSS1064-Q2	DSS1064-Q3	DSS1064-Q4
	Wavelength	1064 nm			
	Pulse Energy	> 10 μJ @15kHz	> 20 μJ @10kHz	> 50 μJ @1kHz	> 90 μJ @1kHz
	Peak Power	> 6.5 kW @15kHz	> 13 kW @10kHz	> 30 kW @1kHz	> 60 kW @1kHz
	Pulse Repetition Rate	≤ 20 kHz	≤ 10 kHz	≤ 2.5 kHz	≤ 1 kHz
	Pulse Width, FWHM	≤ 1.5 ns			
	Polarization Ratio	> 100:1 vertical			
	Pulse Energy Drift ¹⁾	< ± 5 %	< ± 5 %	< ± 5 %	< ± 5 %
	Pulse-To-Pulse RMS ²⁾	< 3% @15kHz	< 2% @10kHz	< 2% @1kHz	< 2% @1kHz
	Laser Classification	4 / IV	4 / IV	3B / IIIb	3B / IIIb
Optical Output	Spatial Mode	TEM ₀₀ (Main Axis Divergence Ratio < 1.3)		TEM ₀₀ (Main Axis Divergence Ratio < 1.8)	
	Beam Divergence, 2Θ	< 3.0 mrad	< 3.0 mrad	< 4.0 mrad	< 4.0 mrad
	Beam Diameter	500 ± 100 μm	500 ± 100 μm	600 ± 100 μm	650 ± 100 μm
Electrical Data	Power Consumption	10 W (max.40 W)	13 W (max.40 W)	15 W (max.70 W)	22 W (max.80 W)
	Operating Voltage	12 V DC			
	Line Voltage	90 - 265 V AC			
	Marking	CE			
Interfaces	RS 232, USB				
	External Trigger (TTL, rising edge) single shot (pulse on demand) – max. repetition rate				
	Interface for TTL-control and power monitor				
Miscellaneous	Warm-up Time	< 5 min			
	Operating Temperature	18 - 38 °C			
Options	Stand-alone system (incl. key-switch, heat-sink and manual shutter; CDRH compliant)				
	Synchronization signal output (rise time < 2 ns)				
	Fiber coupling for fiber with core diameter > 70 μm				
	Manual shutter or electrical beam blocker				
	External beam expander (e.g. 3x)				
	Manual or electrical attenuator				

¹⁾ Drift over 6 hours, energy averaged over 10 sec after 5 min of continuous operation, temperature variation $\pm 3 \text{ }^\circ\text{C}$ and $< 3 \text{ }^\circ\text{C/hour}$.


²⁾ RMS over 1000 pulses after 5 min of continuous operation.

Dimensions


Laser Head: 87.5 x 35.4 x 33 mm

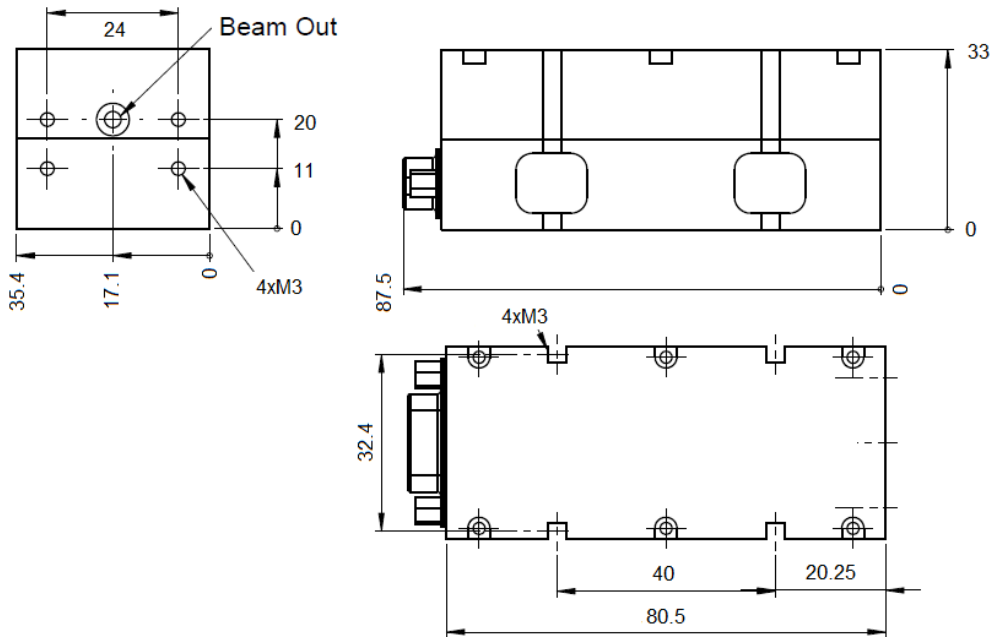

Controller Stand-Alone: Q1, Q2: 135 x 115 x 64 mm; Q3, Q4: 175 x 115 x 64 mm

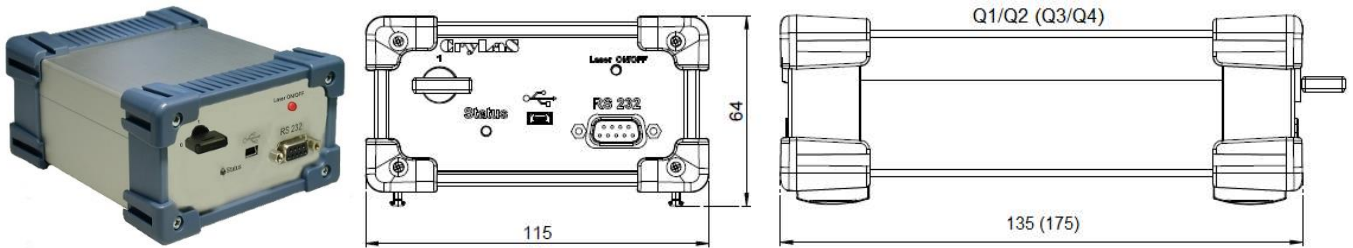

Controller OEM: Q1, Q2: 133 x 130 x 35 (50) mm; Q3, Q4: 173 x 130 x 35 (50) mm (OEM-IL)

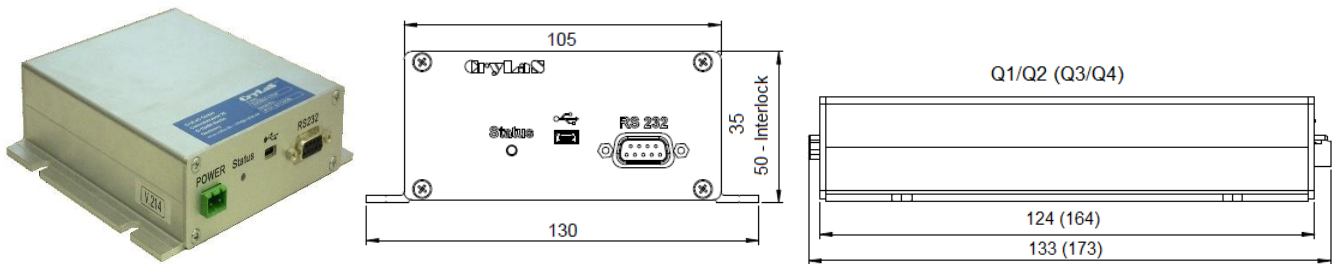

Laser Safety Label

The DSS1064-Q lasers are class 4 / IV or 3B / IIIb according to IEC 60825-1:2014

wavelength: 1064 nm max. output: 30 μJ pulse duration: < 1.7 ns max. repetition rate: 22 kHz Complies with IEC 60825-1:2014 Complies with 21CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated July 28, 2001	wavelength: 1064 nm max. output: 50 μJ pulse duration: < 1.7 ns max. repetition rate: 11 kHz Complies with IEC 60825-1:2014 Complies with 21CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated July 28, 2001	DANGER - INVISIBLE LASER RADIATION AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION CLASS 4 LASER PRODUCT	wavelength: 1064 nm max. output: 300 μJ pulse duration: < 1.7 ns max. repetition rate: 1.2 kHz Complies with IEC 60825-1:2014 Complies with 21CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated July 28, 2001	wavelength: 1064 nm max. output: 150 μJ pulse duration: < 1.7 ns max. repetition rate: 2.7 kHz Complies with IEC 60825-1:2014 Complies with 21CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated July 28, 2001	WARNING - INVISIBLE LASER RADIATION AVOID EXPOSURE TO BEAM CLASS 3B LASER PRODUCT
--	--	--	--	--	---

Q1 series

Q2 series

Q3 series

Q4 series

