

eMOPA 213-20

Diode pumped passively Q-switched solid state laser

- **213 nm**
- **Single Pulse**
- **< 1.0 ns**
- **single shot (pulse on demand) – 1 kHz**
- **> 20 μ J**
- **External / Internal Trigger**



biology · biomedicine · chemistry · analytics

Optical Data	Wavelength	213 nm
	Peak Power	> 20 kW @ 1000 Hz
	Pulse Energy	> 20 μ J @ 1000 Hz
	Beam Divergence (full angle)	< 1.5 mrad
	Beam Ellipticity	< 3:1
	Beam Diameter	0.6 $\pm$ 0.3 mm (at laser exit)
	Spatial Mode	TEM ₀₀
	Pulse Repetition Rate (with external trigger)	single shot (pulse on demand) – 1 kHz
	Pulse Width (FWHM)	< 1.0 ns
	Polarization Ratio	> 100:1, horizontal
	Pulse Energy Drift over 6h ¹⁾	< $\pm$ 5 %
	Pulse-to-Pulse Energy Stability ²⁾	< 3%
	Laser Classification	4 / IV
Optical Output	Free Beam	
Electrical Data	Electrical Power Consumption	< 100 W
	Line Voltage	90 - 265 V AC (50-60 Hz)
Interface	USB / RS232	
	BNC connector for external triggering (TTL)	
	SMB connector for 24 V DC output	
Miscellaneous	Warm-up Time	< 10 min
	Operating Temperature	22 - 32 °C
	Laser Head Size	56 x 140 x 265 mm (H x W x L)
	Stand-Alone Unit Size	129,5 x 177 x 180 mm (H x W x L)
Options	Electrical beam blocker	
	Synchronization signal output (rise time < 1.5 ns)	


¹⁾ Averaged over 10s after 10min of continuous operation @ 1kHz

²⁾ Over 1000 pulses @ 1kHz after 10min of continuous operation


Dimensions

Laser Head:

265 x 140 x 56 mm

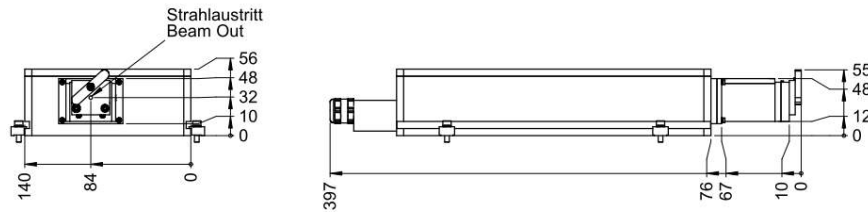


Befestigung mit / mounting with:
4xM4 DIN ISO EN 4762

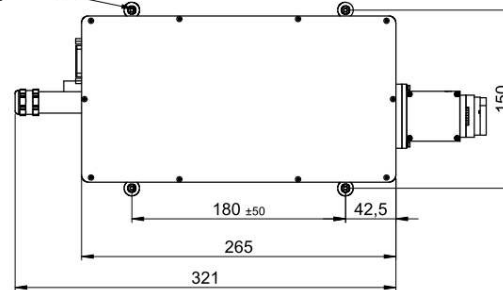


Controller OEM:

166 x 144 x 105 mm

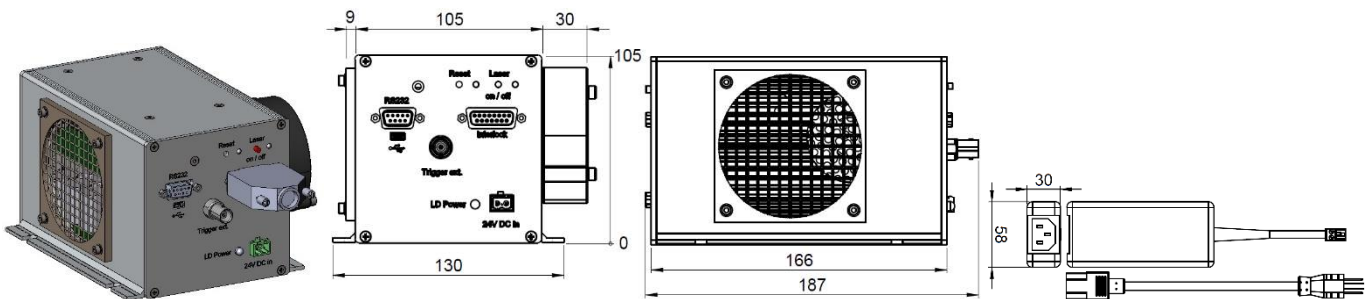

Controller Stand-Alone:

180 x 177 x 129.5 mm

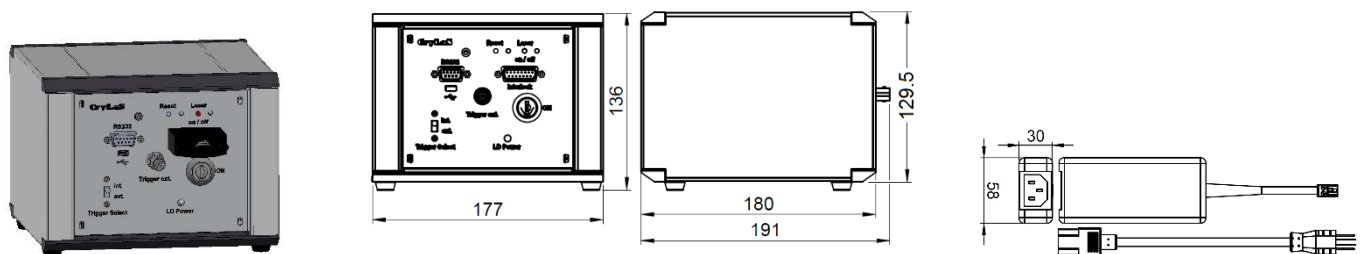

Laser Safety Labels

The eMOPA 213-20 lasers are class 4 according to IEC 60825-1

OEM Laser Device Cautions 1 is designed for use solely as a component and therefore does not comply with 21CFR 1040.10 and 1040.11 Complies with IEC 60825-1:2014	DANGER - INVISIBLE LASER RADIATION AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION
wavelength: 213 nm max. Output: 60 μJ pulse duration: <1.0 ns max. repetition rate: 2000 Hz	CLASS 4 LASER PRODUCT

